




Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

#2

10/500364



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

01205184.3

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT/EP 02 / 14885

Anmeldung Nr:
Application no.: 01205184.3
Demande no:

Anmeldetag:
Date of filing: 28.12.01
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

ABB T D Technologies Ltd.
PO Box 8131
8059 Zürich
SUISSE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

A method for on-line calibration of low accuracy voltage sensor through
communication bus

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G01R/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Voltage measurement is therefore generally carried out when it is aimed at protection functions at a switchboard level, i.e. for under-voltage or over-voltage protection. Using expensive equipments and complicated cabling is much less reasonable and affordable when the voltage information is required for protection functions at a feeder level, such as, for example, for all directional current protection.

Goal of the invention is the definition of a system architecture allowing for supplying a single circuit breaker electronic device with reliable and accurate voltage measurement.

The definition of such a system architecture consists in the choice of the necessary hardware equipment to implement a calibration procedure, in order to achieve a low cost, high accuracy measure on each load side of a circuit breaker. The system architecture according to the present invention, consists therefore in the proper choice of communication media, electronic devices and voltage sensors, as well as a proper voltage transformers architecture.

In the system according to the present invention, the voltage sensors are directly wired to an electronic device on-board the circuit breaker for better reliability and for sustaining high dynamics of voltage-based protection functions.

When the voltage measurement is located on the load side of a circuit breaker equipped with a proper electronic device, it is possible to achieve

a high accuracy by implementing an on-line calibration procedure. The method for on-line calibration according to the present invention is based on the availability of a high accuracy and stability voltage transformer on the busbar. The voltage information coming therefrom is communicated to all the electronic devices which are on-board the circuit breakers or present in the switchboard, so as to calibrate the local low accuracy capacitive voltage sensor.

The system architecture and the method according to the present invention have several advantages.

- The requirements on the communication are lowered, as the calibration can be made on-line but the information needs to be sent out with a low frequency, i.e. with a minimum time scale. Also, the dynamic has to be higher of the system thermal dynamic only.
- It enables the reliability of wired connection of the integrated sensor to the electronic device for protection; at the same time, the accuracy is comparable to a voltage transformer at the basic cost.
- The limits of capacitive sensor technology, where a high accuracy is difficult to achieve due to value variation of the capacitance within the operating thermal range, are solved. By calibrating the sensor voltage output with the busbar voltage high accuracy measurement, the temperature dependence is no longer an issue.

- It will enable to reduce the cost of capacitive sensors by choosing a low voltage side capacitor for the divider with low cost and accuracy, as accuracy is provided by the calibration procedure.

The system architecture and the method according to the present invention are now described with reference to figure 2.

Referring to fig. 2, the voltage transformer, designated with reference numeral 1, on the busbar is connected to an Intelligent Process Unit. In figure 2 the Intelligent Process Unit is identified as an electronic device ED, in all similar to the electronic device on-board the circuit breaker. Through this specific electronic device, the voltage measure is available to all the electronic devices present on the communication bus. The need to transfer the full information, i.e. the data samples, or a processed information, such as module and/or phase, in a continuous manner would impose high requirements on the bus transmission capability. At the same time, if the information is used for protection function, a high dynamic of the order of milliseconds and a high reliability of the information bus are mandatory.

Low cost, low accuracy, i.e. 3% or worse, capacitive sensors are also present and are designated with reference numeral 2 and 3. As the voltage measure is available on each circuit breaker load side through such low cost, low accuracy capacitive sensors, it is possible to directly wire the

information to each electronic device, assuring a higher reliability of the local feeder protection functions.

In order to achieve a higher accuracy, the calibration of the sensor output is performed on-line but the information from the voltage transformer is needed only at long intervals, the dynamic required being comparable with the thermal behavior of the system to avoid the temperature dependency of the sensor.

It is therefore possible, using the system architecture and the method according to the present invention, to achieve a reliable measurement of the voltage by using voltage sensors having a relatively low accuracy and a relatively low cost.

I-0268-EP

5

ONTVANGEN 28-12-2001 18:27

VAN-0226232193

NAAR-EPA/EPO/OEB RIJSWIJK PAG'S 013

CLAIMS

1. A method for calibrating voltage sensors in a switchboard, said switchboard comprising a circuit breaker, a first voltage sensor at busbar level, a second voltage sensor on one of the sides of the circuit breaker, a communication bus and a first electronic device, characterized by the following steps:
 - i. performing a measurement using said first voltage sensor;
 - ii. transmitting an information derived from said measurement to said electronic device, through said communication bus;
 - iii. using said information to calibrate said second voltage sensor.
2. A method according to claim 1, characterized in that said first voltage sensor is a voltage transformer.
3. A method according to any of the previous claims, characterized in that said second voltage sensor is a capacitive sensor.
4. A method according to any of the previous claims, characterized in that said second voltage sensor is on the load side of said circuit breaker.
5. A method according to any of the previous claims, characterized in that first said electronic device is on-board said circuit breaker.

6. A method according to any of the previous claims, characterized in that said switchboard further comprises a plurality of electronic devices and a plurality of circuit breakers.
7. A method according to claim 6, characterized in that said information derived from said measurement is transmitted from said first electronic device to any of said plurality of electronic devices.
8. A method according to claim 7, characterized in that at least a part of said plurality of electronic devices is on-board of at least a part of said plurality of circuit breakers.

I-0268-BP

7

A METHOD FOR ON-LINE CALIBRATION OF LOW ACCURACY VOLTAGE SENSOR THROUGH COMMUNICATION BUS

ABSTRACT

A method for calibrating voltage sensors in a switchboard, using a communication bus which comprises the following steps

- i. performing a measurement using a first voltage sensor;
- ii. transmitting an information derived from said measurement to an electronic device, through the communication bus;
- iii. using said information to calibrate a second voltage sensor.

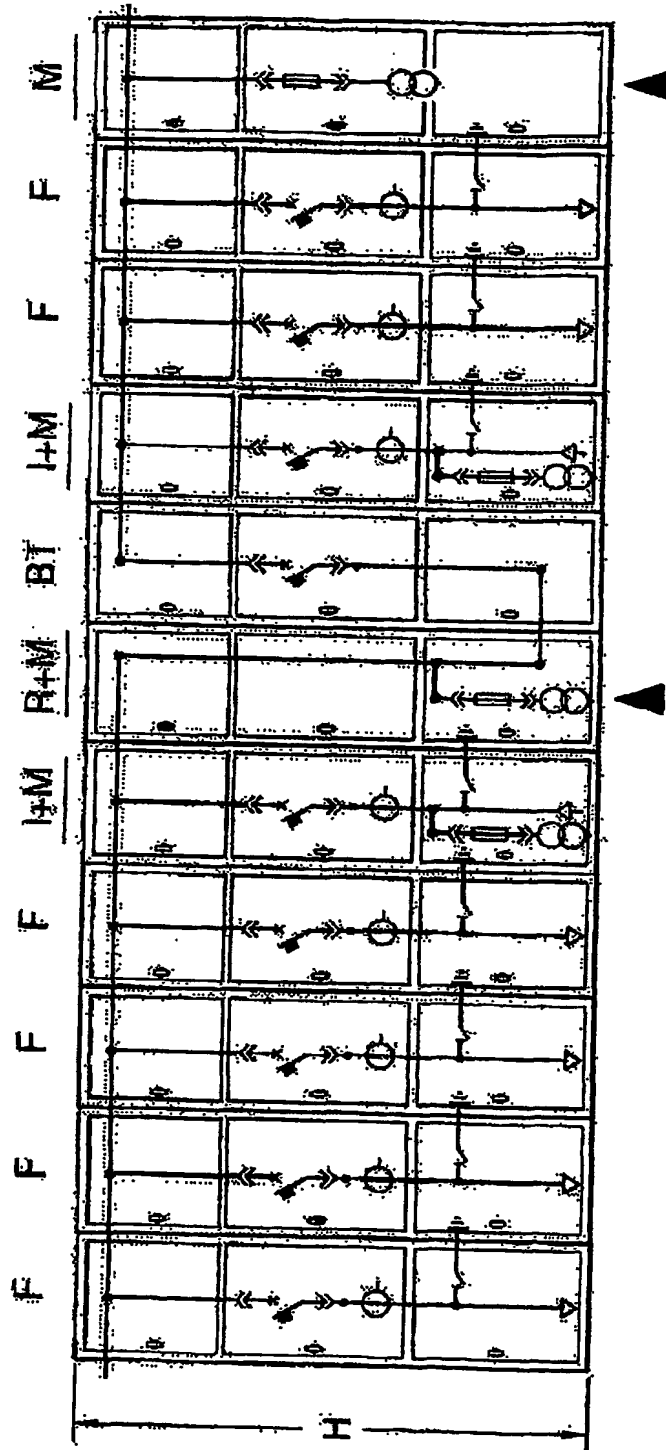


Figure 1

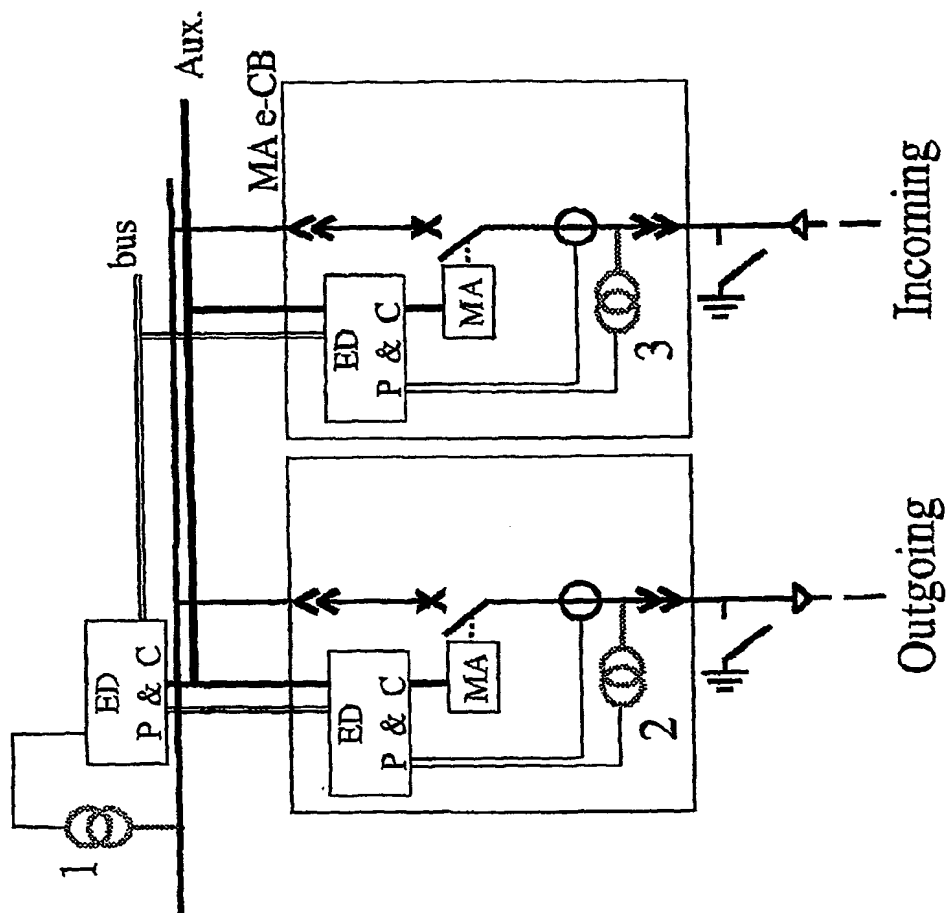


Figure 2